


9.4. Destination

Destination is set for all data in u-DIEX. Destination setup methods are “one by one setup” and “Inheritance setup”. Destination is selected from user/process/organization/company set for the user role of the folder. If a company is set for the destination, data is released to all users and processes within that company. If an organization is set for the destination, data is released to all users and processes within that organization.

[One by one setup]

Selects the destination from user/process/organization/company set for the destination of high-level folder.

[Destination setup one by one]

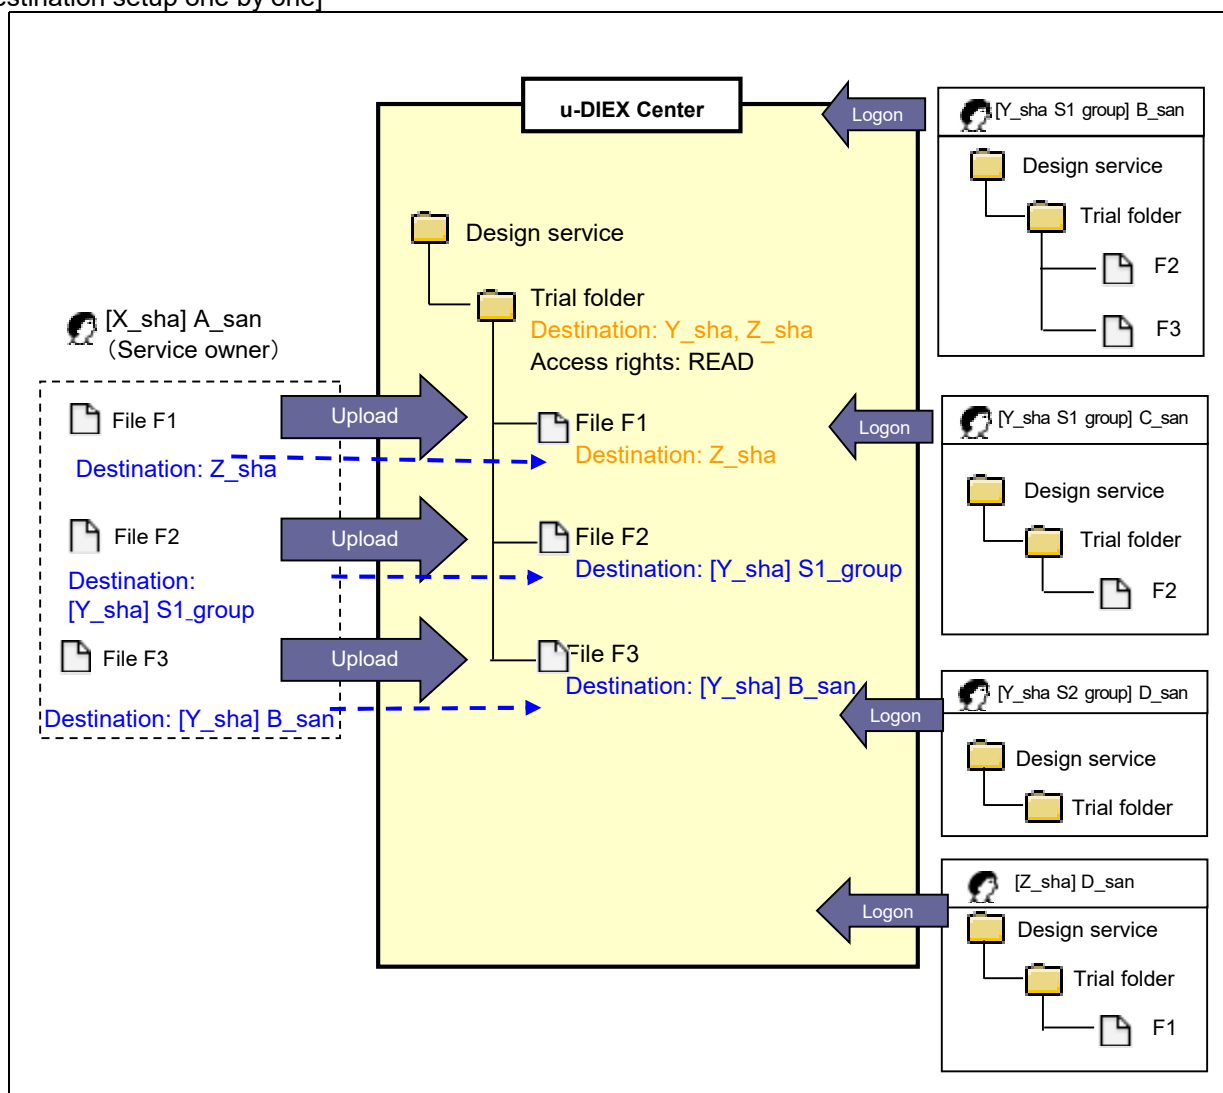


Upload file	Destination			Released user
	Company	Organization	User	
F1	Z_sha	-	-	Users and processed within Z_sha
F2	Y_sha	S1_group	-	Users and processes within Y_sha
F3	Y_sha	-	B	B from Y_sha

[Inheritance setup]

Inherits the destination set for the folder to store data.

[Destination setup by Inheritance]

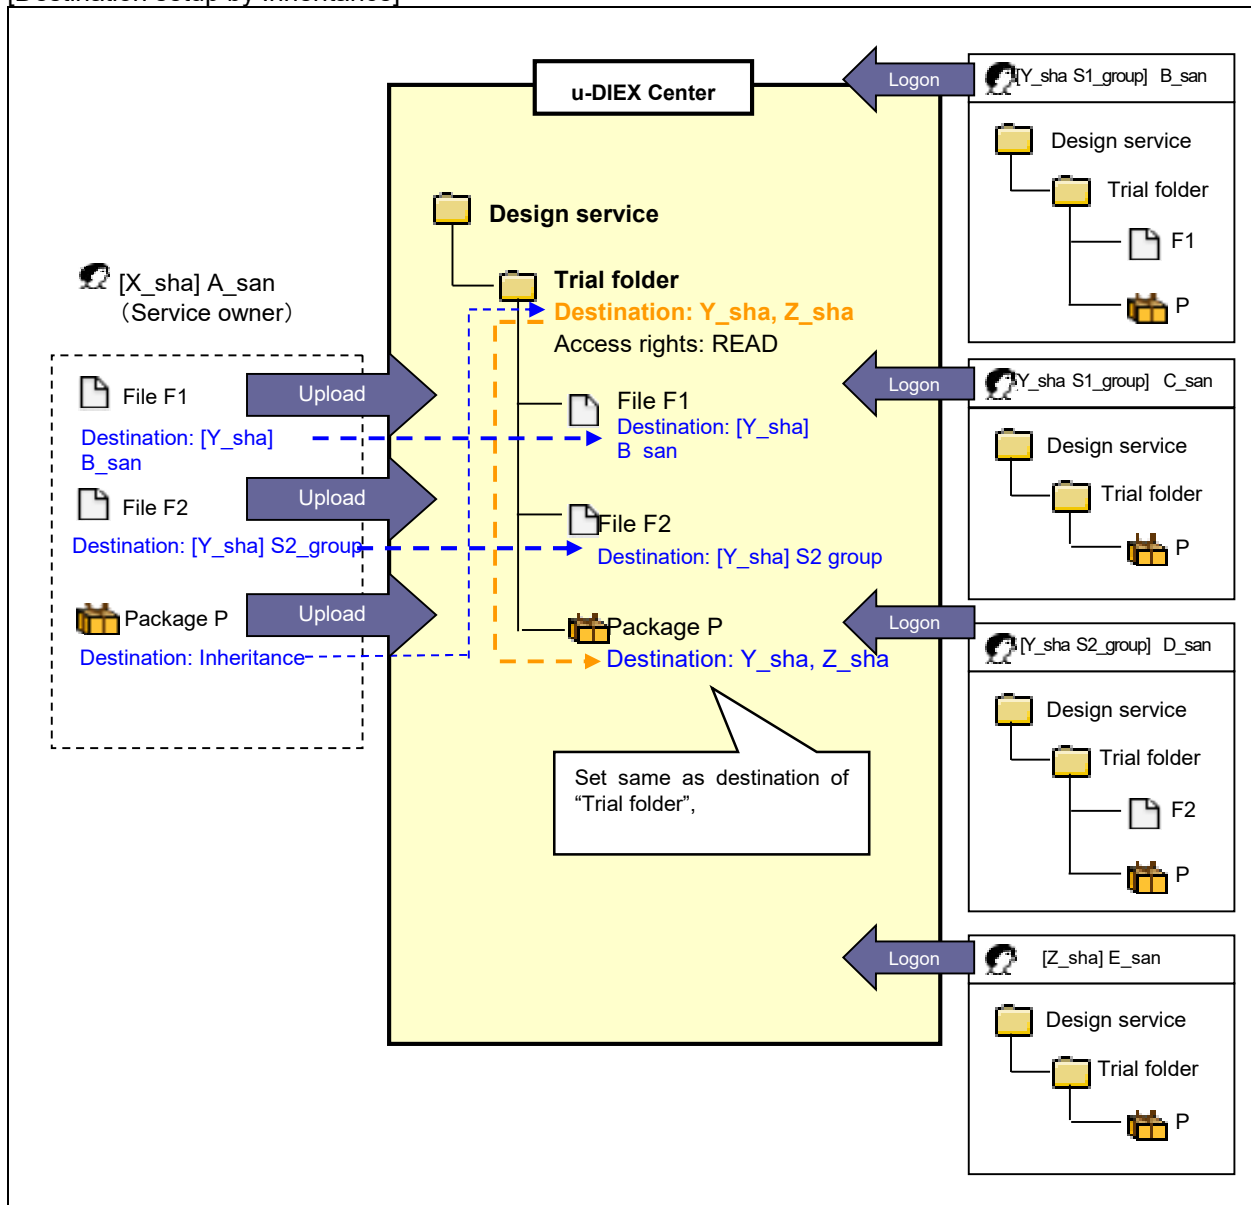

Upload file	Destination			Released user
	Company	Organization	User	
F1	Y_sha	-	B	B from Y_sha
F2	Y_sha	S2_group	-	All users and processes within [Y_sha] S2_group
Package	Inheritance			All users and processes within Y_sha and Z_sha